



B453 263rdW

The Sedgwick County Electric Cooperative Association, Inc.

1355 S. 383rd St. W. • P.O. Box 220 • Cheney, KS 67025-0220

Phone (local) 316-542-3131 • Fax 316-542-3943

Toll Free 1-866-542-4732

February 19, 2014

Penny L. Evans
Sedgwick County Public Works
1144 S. Seneca
Wichita, Kansas 67213-4443

Re: Sedg. Co. Proj. No. B453 (787-U-2640)

Dear Ms. Evans,

Please find the enclosed copy of Sedgwick County Electric Cooperative's construction costs and work order to relocate the 12,470 volt electric line for bridge #B453. These lines were on private property before the Sedgwick County purchased additional ROW.


Once acceptance of a purchase order for \$9,921.00 for B453 is received from Sedgwick County Public Works we will schedule relocation of this electric line. As long as there is not a delay in payment a May 1, 2014 "clear date" should not be a problem to meet.

If you have any other questions or comments you may contact me directly at (316)-542-3131 or email me at sayres@sedgwickcountyelectric.coop.

Thank you,

Scott A. Ayres

Engineer
Enclosures



WORK PLAN REFERENCE	
NEW CONSTRUCTION	
SYSTEM IMPROVEMENT	
REPLACEMENT	X
RETIREMENT AND REPLACEMENT	
NO. OF SERVICES	

STAKING SHEET
System Designation: Line Section 8700
REA ID No. KS18018


Location: Sedgwick County
Twp 28 S R 3 W Sec 15 W Side & 16 E Side
Map Reference: 83-15 W. Side & 16 E. Side

Kind: 3W Pole Size: 1 1/2" x 2 1/2" Rating Span: 8700

Work Order No. 140114
Sheet No. 1 of 1
Line 11-3 Lead A, B, C, D
ENGINEER: [Signature]
Checked: [Signature]
Released for Const. [Signature]

NUMBER POLES ON SKETCH AT CORNERS, TRANSFORMERS AND DEADENDS. INDICATE RETIRED UNITS WITH * . REPLACED UNITS WITH 0

POLE NO.	PRI. (BACK) SPAN	POLES H.A.C.		PRI. UNIT	R.W. CLEARING	LINE ANGLE	TRANS. "G"	GR. "W2"	GUY		SECONDARY		SERVICE		SEC. OR SER. WIRE SIZE	METER SIZE	MISC. & REMARKS		
		MISC.	MISC.						UNIT	LEAD	SPAN	SEC. ONLY	UNIT	SPAN				NO.	K
Ex. 1				A1					2	1-2	27'	1-25	E3-10	North					
add				A4					2	1-2	21'	1-25	E3-10	West					
Add 2	225'	10'	40-4	A1	M5-6				1										
Add 3	225'	10'	45-4	A4					2	1-2	27'	1-25	E3-10	South					
Ex. 4				C1					1	1-2	6'	1-25	E3-10	West					
add	175'	10'	40-4	C1	A5-2				1	1-2	15'	1-25	E3-10	West					
Ex. 5				C1					2										
add				C1					2										
Ex. 6	400'			C1	A5-2				1	1-2	18'	1-25	E3-10	West					
add (10' spans)	50-3			C1	M5-10				2	1-2	10'	1-25	E3-10	West					

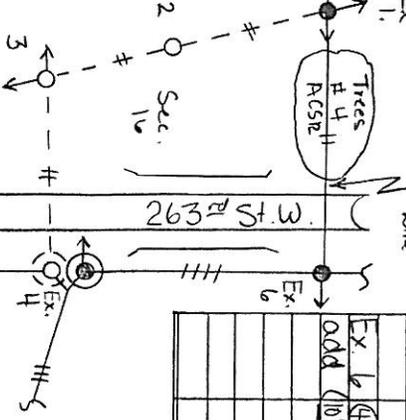

Date Completed _____
Foreman KS 1 Call # _____
Comp by _____

PRIMARY LINE	FEET	NO. OF WIRES	POLE FEET	CONDUCTOR FEET
SECONDARY				
BARE				
COVERED				
UNDERBUILD				
SERVICE DROP				
TOTAL				
NO. OF MEMBERS:				



The Sedgwick County Electric Cooperative Association, Inc.

1355 S. 383rd St. W. • P.O. Box 220 • Cheney, KS 67025-0220

Phone (local) 316-542-3131 • Fax 316-542-3943

Toll Free 1-866-542-4732

SEDGWICK COUNTY BRIDGE JOB B-453

WORK ORDER #140114

REWORK LINE ON PRIVATE PROPERTY FOR BRIDGE REBUILD

Ex.6 @ Approx. Location 476+36, 41' Rt. WAS ON PRIVATE PROPERTY (LOCATION STAYS)
NEW POLE WILL BE AT THIS SAME LOCATION AND SET 4' DEEPER FOR CONTRACTOR CUT

RM. 35-6	\$ 121.00
RM. C1	\$ 330.00
RM. A5-2	\$ 130.00
RM. M5-10	\$ 193.00
RM. M2-1	\$ 41.00
RM. E1-2S	\$ 81.00
RM. F1-2S	\$ 30.00
RM. E3-10	\$ 10.00

Ex.4 @ Approx. Location 472+40, 41' Rt. WAS ON PRIVATE PROPERTY (LOCATION MOVES)

RM. 30-6	\$ 102.00
RM. C1	\$ 330.00
RM. G136	\$ 76.00
RM. 10 KVA	\$ 99.00
RM. M2-1	\$ 41.00
RM. K-14	\$ 14.00
RM. E1-2S	\$ 81.00
RM. F1-2S	\$ 30.00
RM. E3-10	\$ 10.00

INSTALL UNITS

ADD 6 @ Approx. Location 476+36, 41' Rt. WAS ON PRIVATE PROPERTY (LOCATION STAYS)

ADD 50-3 POLE	\$ 1,408.00
ADD C2-2 CROSSARM LINE UNIT	\$ 1,920.00
ADD M2-2	\$ 116.00
ADD POLE FOAM	\$ 207.00

PAGE 1

Ex.4 @ Approx. Location 472+30, 41' Rt. WAS ON PRIVATE PROPERTY (LOCATION MOVES)

ADD 40-4 POLE	\$ 872.00
ADD C2-2 CROSSARM LINE UNIT	\$ 1,920.00
ADD A5-2 LINE UNIT	\$ 284.00
ADD M5-10 CUTOUT	\$ 328.00
ADD M2-1 GROUNDING	\$ 116.00
ADD M52-3 SIGNAGE	\$ 72.00
ADD G39	\$ 293.00
ADD 15 KVA	\$ 166.00
ADD K-14	\$ 43.00
WIRE 1/0 UP-DOWN	\$ 250.00
ADD POLE FOAM	\$ 207.00

TREE REMOVAL 0' R-20 @ \$3.00 FT	\$ -
----------------------------------	------

SEDGWICK COUNTY BRIDGE B453	TOTAL COST	\$ 9,921.00
-----------------------------	------------	-------------

COST TO SEDGWICK COUNTY FOR REWORKING POLES THAT WERE
LOCATED ON PRIVATE PROPERTY